

PCG-SE

GRIP COUPLING



grip type pipe coupling, stainless steel aisi 304 case, epdm sleeve

Technical features

Grip Axial restraint

Materials



Case SUS 304
Rubber EPDM (-30°C~+90°C)
Bolt SUS 304
Grip Ring SUS 304H

Options

- Other rubber material and nominal sizes on request
- Vacuum insert-plate on request
- With LR, DNV-GL, ABS, BV, NK, RMRS and NK type approval certificate

Dimensions/specifications

NOM. SIZE	PIPE O.D.	RANGE	LENGTH	W.P.	BOLT	TORQUE	WEIGHT
(DN)	(MM)	(MM)	(MM)	(BAR)	(M)	(Nm)	(Kg)
15	21.3 / 21.7 / 22	± 0.3	57	20	M6	3~5	0.18
20	26.9 / 26.7 / 27.2	± 0.5	57	20	M6	4~6	0.21
25	33.4 / 33.7 / 34.0	± 0.6	57	20	M6	4~6	0.23
32	42.9 / 42.2 / 42.4 / 42.7	± 0.6	57	20	M8	10~12	0.34
40	44.5 / 48.3 / 48.6	± 1.0	57	20	M8	10~12	0.36
50	54.0 / 57.0 / 60.3 / 60.5	± 1.0	80	18	M10	15~18	0.80
65	66.7 / 69.0 / 73.0 / 76.3	± 1.0	80	18	M10	15~18	0.89
80	79.8 / 84.0 / 88.9 / 89.1	± 1.5	108	16	M12	40~50	1.56
100	104.8 / 106.3 / 108.0 / 114.3	± 1.5	108	16	M12	40~50	1.77
125	129.0 / 133.0 / 139.8 / 141.3	± 1.5	117	12	M14	60~80	2.95
150	154.0 / 159.0 / 165.2 / 168.3	± 1.5	117	12	M14	60~80	3.15
200	204.0 / 216.3 / 219.1	± 2.0	155	7	M16	120~150	6.60
250	254.0 / 267.4 / 273.1	± 2.0	155	7	M16	120~150	7.55
300	304.0 / 318.5 / 323.9 / 325.0	± 2.0	155	5	M18	170~190	9.75

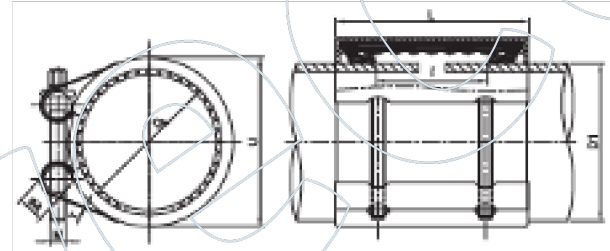

All the product information presented on these pages is only indicative and is provided subject to typographical errors, changes and deviations. The buyer cannot derive any rights from this information. The seller excludes any liability for damage resulting from the use of this information.