

EJS-GN-F1-SP

EXPANSION JOINT (F5584-5K)

Valveco®

nbr rubber bellow, flanged, 5k

Technical Features


| | |
|---------------------|----------------------|
| Design | JIS F 5584-5K |
| Face-to-Face Design | JIS F 5584-5K |
| Inlet Design | Flanged (JIS B 2210) |
| Outlet Design | Flanged (JIS B 2210) |
| Class | 5K |

Options

- Other materials, flange connections and nominal sizes on request
- Vacuum ring
- Tie rods

Dimensions

| DN | Length | PCD | Holes | Holes Dia | Weight |
|------|--------|------|-------|-----------|--------|
| (MM) | (MM) | (MM) | (#) | (MM) | (kg) |
| 32 | 150 | 90 | 4 | 15 (M12) | |
| 40 | 150 | 95 | 4 | 15 (M12) | 3 |
| 50 | 150 | 105 | 4 | 15 (M12) | 4 |
| 65 | 150 | 130 | 4 | 15 (M12) | 5 |
| 80 | 150 | 145 | 4 | 19 (M16) | 5 |
| 100 | 150 | 165 | 8 | 19 (M16) | 6 |
| 125 | 150 | 200 | 8 | 19 (M16) | 9 |
| 150 | 150 | 230 | 8 | 19 (M16) | 12 |
| 200 | 150 | 280 | 8 | 23 (M20) | 15 |
| 250 | 200 | 345 | 12 | 23 (M20) | 24 |
| 300 | 200 | 390 | 12 | 23 (M20) | 26 |

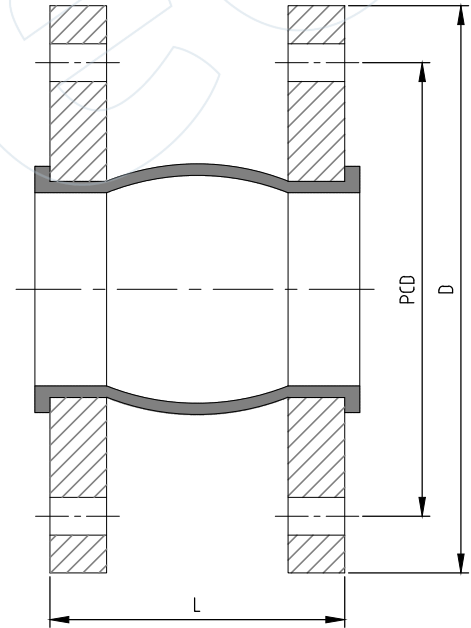

Materials

| | |
|-----------------|--------------|
| Bellow | NBR |
| Flange Material | Forged steel |

All the product information presented on these pages is only indicative and is provided subject to typographical errors, changes and deviations. The buyer cannot derive any rights from this information. The seller excludes any liability for damage resulting from the use of this information.